

TMc150 150mm focal length Monochromator with dual grating turret

AMC150

원우시스템즈 Tel (02) 3289-1290 Fax (02) 3289-1293 WONWOO SYSTEMS 서울시 동작구 신대방1가길 38 (신대방 719 동작상떼빌) 106동 209호

TMc150 Monochromator


The TMc150 single monochromator represents an exceptionally compact measurement solution adapted to measurement where lower spectral resolution is required.

Compatible with the full range of sources, detectors and accessories of the Bentham portfolio, the TMc150 monochromator fits in the smallest of spaces in a measurement set-up and is wellsuited to integration into an OEM system.

Key features include:

- 150mm focal length single monochromator in Czerny-Turner configuration
- Accommodates up to two diffraction gratings to allow single-scan measurement over wide spectral range included in range 200nm-50µm
- One entrance and one exit slit
- Fully automated through USB 2.0 interface

Configuration

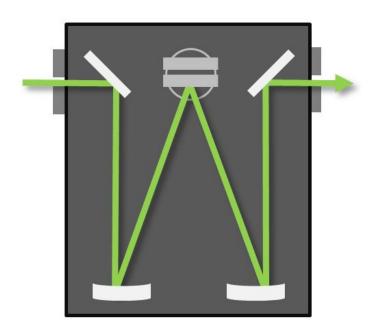




Specification

Optical Layout

Configuration	Symmetrical Czerny Turner
Focal length	150mm
Grating Mount	Dual grating turret
Number of Gratings	1-2
Grating size	30x 30mm
Aperture ratio	f/4.2
Number of Entrance/ exit ports	One entrance, one exit
Number of Entrance/ exit ports Opto-Mechanical	One entrance, one exit
	One entrance, one exit 0.000072°/ step
Opto-Mechanical	
Opto-Mechanical Mechanical resolution drive	0.000072°/ step
Opto-Mechanical Mechanical resolution drive Slit type	0.000072°/ step Fixed, micrometer or motorised variable

Optical Performance (quoted for 1200 g/mm gratings)

Spectral Range	Within range 200nm-50µm
Linear Dispersion	5.4 nm/mm
Wavelength accuracy	± 0.3nm
Wavelength reproducibility	± 0.01nm
Resolution full/reduced slit height	0.3/ 0.4nm
Stray light rejection at 2.5 FWHM	10^-5
Automation	
Computer interface	USB 2.0
Software Control	Benwin+/ SDK
Electrical/ Mechanical	
Overall dimensions	137W x 232D x 168H
Optical height (mm)	110mm
Weight	6 kg
Power supply	External DC p.s.u.
Options	
Diffraction gratings	See separate Diffraction Gratings datasheet
Order sorting filters	See separate Order Sorting Filters datasheet
252-8	8-position order-sorting filter wheel (filter diameter

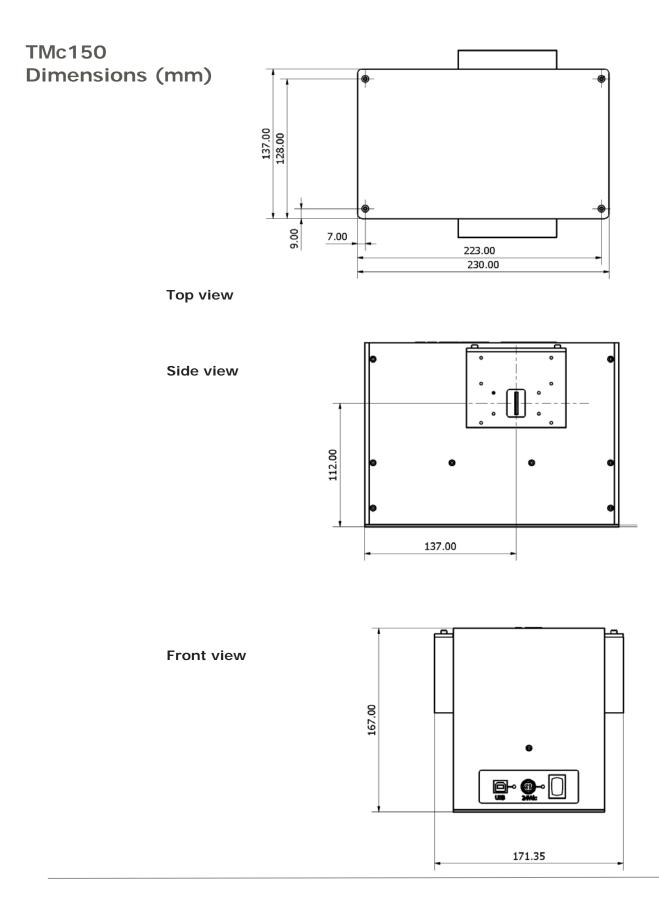

TMC150_3V0

